

JuiceStand User Manual

ENGLISH




enel  way

Table of contents

Welcome	3
Package Contents	3
JuiceStand Components	3
Fasteners - JuiceBox Next Gen	4
Base Mount Hardware for JuiceStand	4
JuiceStand Dimensions	4
Installation Area	4
Installation - JuiceBox Next Gen	5
Connect Power	7
Important Safety Information	8

Welcome

This manual explains how to install the JuiceStand.

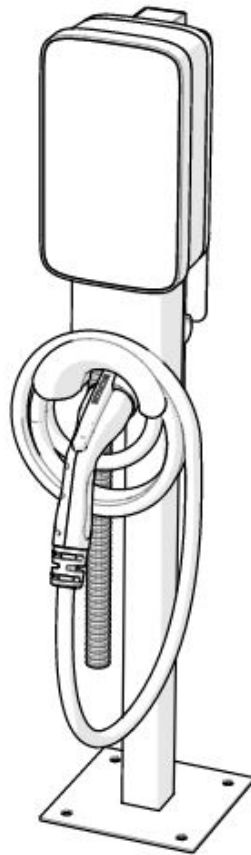

Package Contents

JuiceStand Components

- > JuiceStand

Fasteners – JuiceBox Next Gen

- > 3 in long 10–32 Phillips screws (Number 2 drive size) (x2) **[Recommended Torque: 25 in lbs]**
- > 0.172 in ID washers (x2)

Base Mount Hardware for JuiceStand

- > 5 in long and 3/8 in in diameter (x4) Stud Anchors for Concrete **[Recommended Torque: 30 ft lbs]**
- > 8 in long and 3/8 in in diameter (x4) J-Hook Anchors for Wet Concrete **[Recommended Torque: 25 ft lbs]**
- > 3/8 in washers (x4)
- > 3/8 in –16 hex nuts (x4)

JuiceStand Dimensions

- > Height: 40 in (101.6 cm)
- > Width: 3.5 in (8.9 cm) x 6 in (15.2 cm) deep
- > Base: 8 in (20.32 cm) x 8 in (20.32 cm)

Installation Area

Refer to the [Concrete Pad Preparation](#) in Enel X Way Site Design Guide.

Installation – JuiceBox Next Gen

This procedure explains how to install one charging station onto the stand. If applicable, perform the same procedure for both charging stations.


This procedure applies only to “JuiceBox Next Gen”. Verify the correct product before installing.



NOTE:

- > The JuiceStand must be installed in accordance with the National Electrical Code (NFPA 70) and all applicable local jurisdiction requirements.
- > Junction Boxes must be UL Listed or UL Certified for outdoor-use.
- > Conduit fittings must be liquid-tight and UL Listed or UL Certified for outdoor-use.


1. Secure the JuiceStand to the ground stud anchors (refer to [Installation Area](#) for more information).

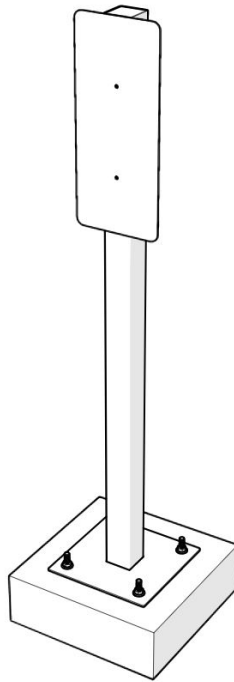

2. Secure the JuiceStand and charging station with the washers and screws.



NOTE: It is recommended to apply a torque of 25 in lbs to the screws.

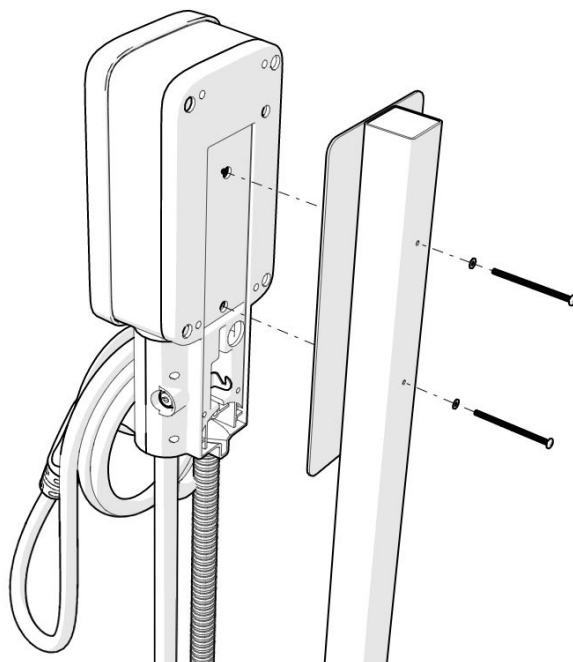

Connect Power

1. Turn off the mains power to the hardwire connections.
2. Use a multimeter to ensure that there is no power at the hardwire connections.



WARNING: Do not continue with the installation until the multimeter shows that there is no power at the hardwire connections to mains.

3. Connect the mains power wires to the EVSE wires.

JUICEBOX NEXT GEN

BLACK	RED	GREEN
L1	L2	Ground




NOTE: For JuiceBox Next Gen, L1 is black and L2 is red.


4. Reconnect power to the hardwire connections. The charging station turns on automatically.

Important Safety Information

Read all safety information before installing this product.


 **Warning:** This device should be supervised when used around children.


 **Warning:** Do not put fingers into the electric vehicle connector.


 **Warning:** Do not use this product if the flexible power cord is frayed, has broken insulation, or shows any other signs of damage.


 **Warning:** For use with electric vehicles only.


 **Warning:** Do not use this device with an extension cord.


 **Warning:** Do not remove cover or attempt to open the enclosure. No user serviceable parts inside. Refer servicing to qualified service personnel.

 **Warning:** Install and use away from flammable, explosive, harsh or combustible vapors, materials or chemicals.

 **Warning:** Do not operate outside temperature rating of -40°C to $+60^{\circ}\text{C}$.

 **Warning:** This device is intended only for electric vehicles not requiring ventilation during charging.

 **Warning:** This product must be grounded. If it should malfunction or break down, grounding provides a path of least resistance for electric current to reduce the risk of electric shock.

 **Warning:** Improper connection of the equipment-grounding conductor is able to result in a risk of electric shock. Check with a qualified electrician or serviceman if you are in doubt as to whether the product is properly grounded.